

**Screening
has not
changed
much
in fifty
years.**

Until now.



ROCKSHIELD RUBBER COMPANY

ROCKSHIELD RUBBER COMPANY
107 Industrial Ave
Milltown, WI 54858



ROCKSHIELD RUBBER COMPANY




**WE HAVE
YOUR NEW
LUCKY
NUMBER**

RockShield is excited to announce the newest addition to our lineup - the RSX-16.

The 16" width of our durable rubber screen offers significantly more open area, easier maintenance and increased uptime.



ROCKSHIELD RUBBER COMPANY

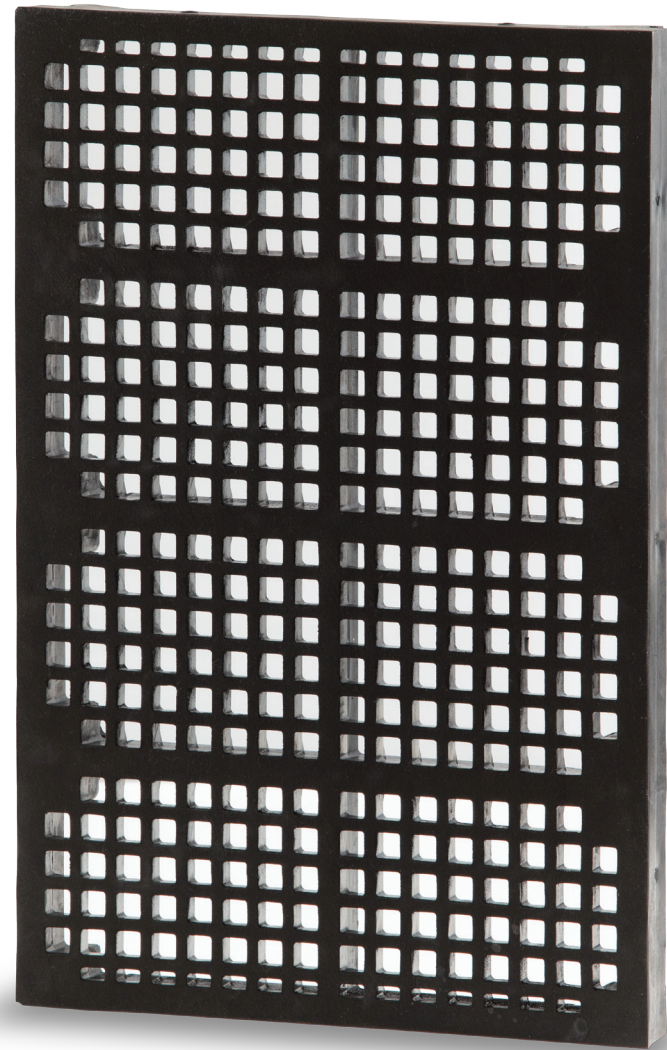

Innovation. With the durability you've come to expect from RockShield.

Increase your open area

- Wider panels reduces number of solid lands running down the length of the deck allowing for more openings across the width of the machine.
- Wider panel allows for more efficient layouts with larger openings vs conventional 12" wide panels.
- Great open area = More product on the ground.

Reduced stress on your machine = more up time

- Additional width reduces the amount of stringers required per deck, making the system lighter and lowering stresses on the machine.
- Wider panels allow you to install more screening area in a shorter period of time thus decreasing change out times.

No access? No problem. Our design focuses on end users in the field.

- Extra clearance between stringers allows for easier access into the screen itself.
 - Clearance between stringers using 12" wide panel = 10"-11"
 - Clearance between stringers using 16" wide panel = 14.50"
- No extra tools required. No bolts, fasteners or pins to remove.
- Fewer panels and stringers per deck reduces the overall cost per sq. ft.

Converting to RSX-16 is simple and easy!

Scheduled changeouts are the ideal time to convert your stringers.


- Stringer system is extremely user friendly and easy to source if needed. Stringers come in standard 1.50" square and 1.50" x 3.00" rectangular steel tubing which are then welded into the deck.
- No fasteners required for installation. The panels simply snap into place and the new segmented snap profile generates phenomenal holding power.
- The slotted stringer locks the panel in-place so the panel can't move down the deck and the segmented snap makes installation in lower head room areas much easier.

Standard panel size: 16.00" wide x 24.00" long. 8.00" wide panels available for certain deck widths or when staggered layouts are preferred.

- Standard thicknesses: 1.50" & 2.00" but custom thicknesses are available to meet your needs.
- Robust frame design can withstand heavily loaded decks.



The slotted stringer locks the panel in-place so the panel can't move down the deck and the segmented snap makes installation in lower head room areas much easier.

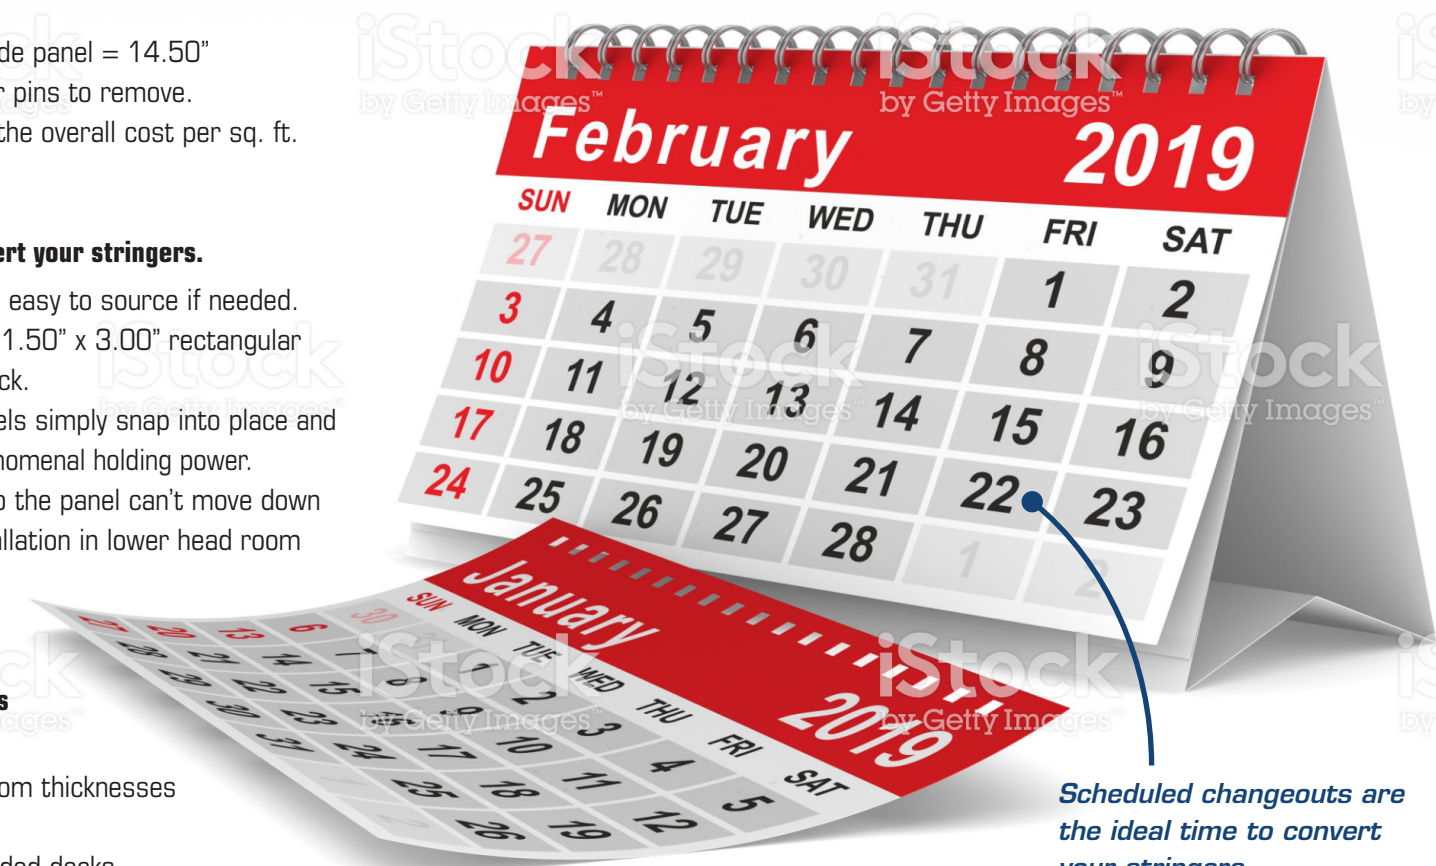

Scheduled changeouts are the ideal time to convert your stringers.



This is the actual width of our RSX-16!